


STYLE 300 COMPRESSED SHEET GASKET

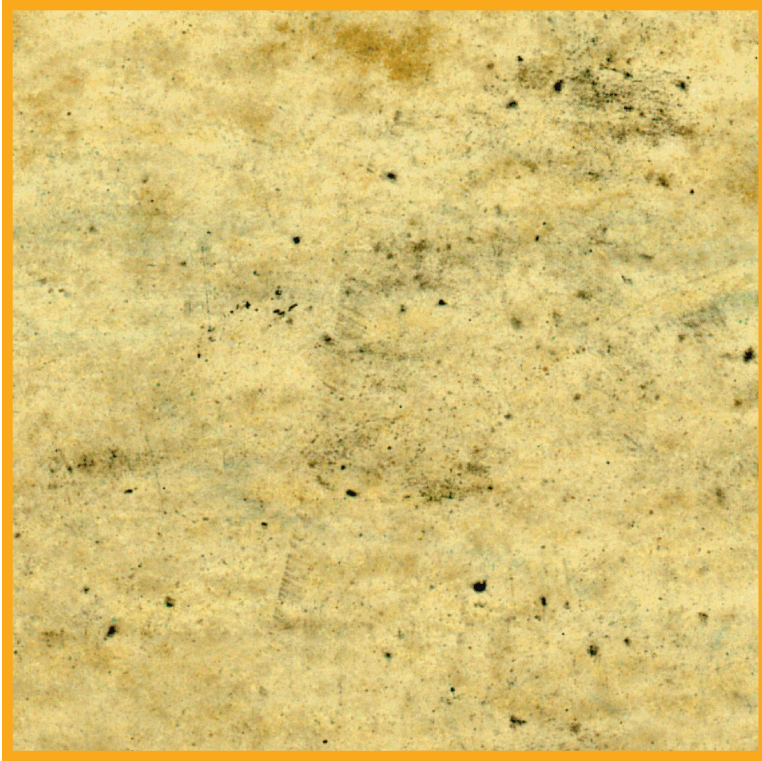

Manufactured from synthetic fibers and a SBR binder, and vulcanized to provide maximum strength and yield characteristics, this sheet is favored where color contamination of the product must be avoided. The maximum temperature limit is 750°F and 399°C. **Style 300** withstands pressures up to 1200 psi. It is recommended for all food handling and process equipment conveying products which must be kept uncontaminated from graphite and other discolorants. **Style 300** services water, steam, mild chemicals, and inert gases.

SPECIFICATIONS

Style: 300 Compressed Sheet Gasket

Binder: SBR

Color: Off White

Pressures: 1200 psi max.

Temperatures: up to 750° F / 399° C

Sizes: 60" x 60"

Thicknesses: 1/64", 1/32", 1/16", 3/32", 1/8", 1/4"

"Since the performance of the gasket material is dependent on many other factors not related to the gasket itself, purchaser is **WARNED** that the maximum operating conditions shown in the Technical Data Chart may not be achieved under the certain conditions. Purchaser is therefore urged to test the gasket material under the actual conditions of assembly and operation to determine the appropriate maximum operating conditions."

This information is based on data that we believe to be reliable. Since conditions of product use are outside of our control, we make no warranties, expressed or implied and assume no liability in connection with any use of this information.

Certified to ISO 9001: 2000 Standards.

Quality Fluid Sealing Solutions for Industry.