SEPCO®
Sealing Equipment Products Co., Inc.

Contact Us Today!

Phone: 205.403.7500 / 800.633.4770
Fax: 205.403.7592 / 800.426.3533
Mail: 123 Airpark Industrial Rd.
Alabaster, AL 35007
Email: sales@sepcoUSA.com
Website: www.sepcoUSA.com

FG 670 & FG 671

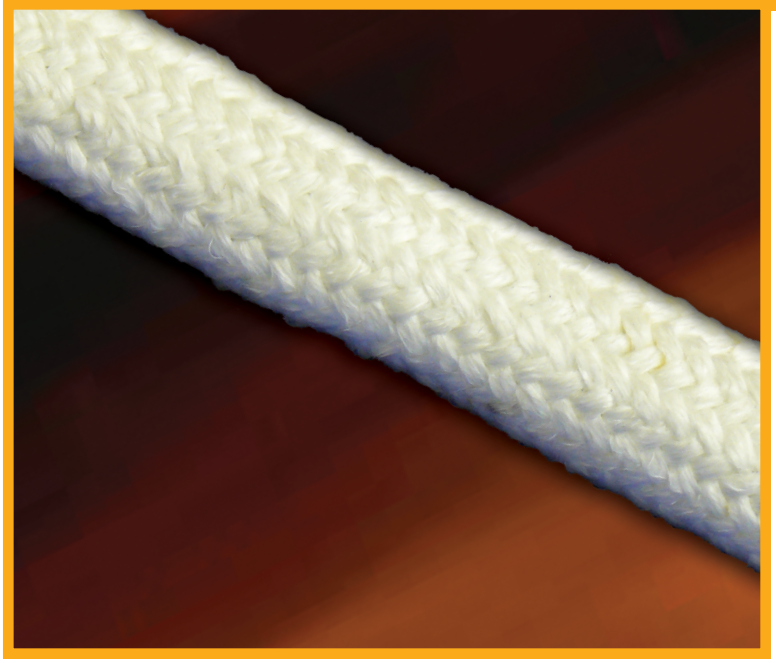

FEATURES
SEPCO Insutube is a lightweight insulation tubing comprised of an inner core of braided fiberglass tubing surrounded by a glass fiber insulation media with an outer jacket braided over the insulating media and tubing core.

TREATMENT
None

RECOMMENDED FOR
Pipe insulation for steam, water, oil, and chemical services where protection from the weather is needed

SERVICE CONDITIONS
Temperatures to 500°F/260°C

FEATURES
Same as FG-670, except outer jacket waterproofed with neoprene compound.

TREATMENT
Neoprene Coating

RECOMMENDED FOR
Pipe insulation for steam, water, oil, and chemical services where protection from the weather is needed

SERVICE CONDITIONS
Temperatures to 500°F/260°C

This information is based on data that we believe to be reliable. Since conditions of product use are outside of our control, we make no warranties, expressed or implied and assume no liability in connection with any use of this information.