


ML2235

SEPCO[®] ML2235 prelubricates the fibers of the ML2235 to provide a softer, more flexible packing. It has improved peripheral speed characteristics and exothermic properties, unlike other PTFE fluorocarbon filament packing.

ML2235

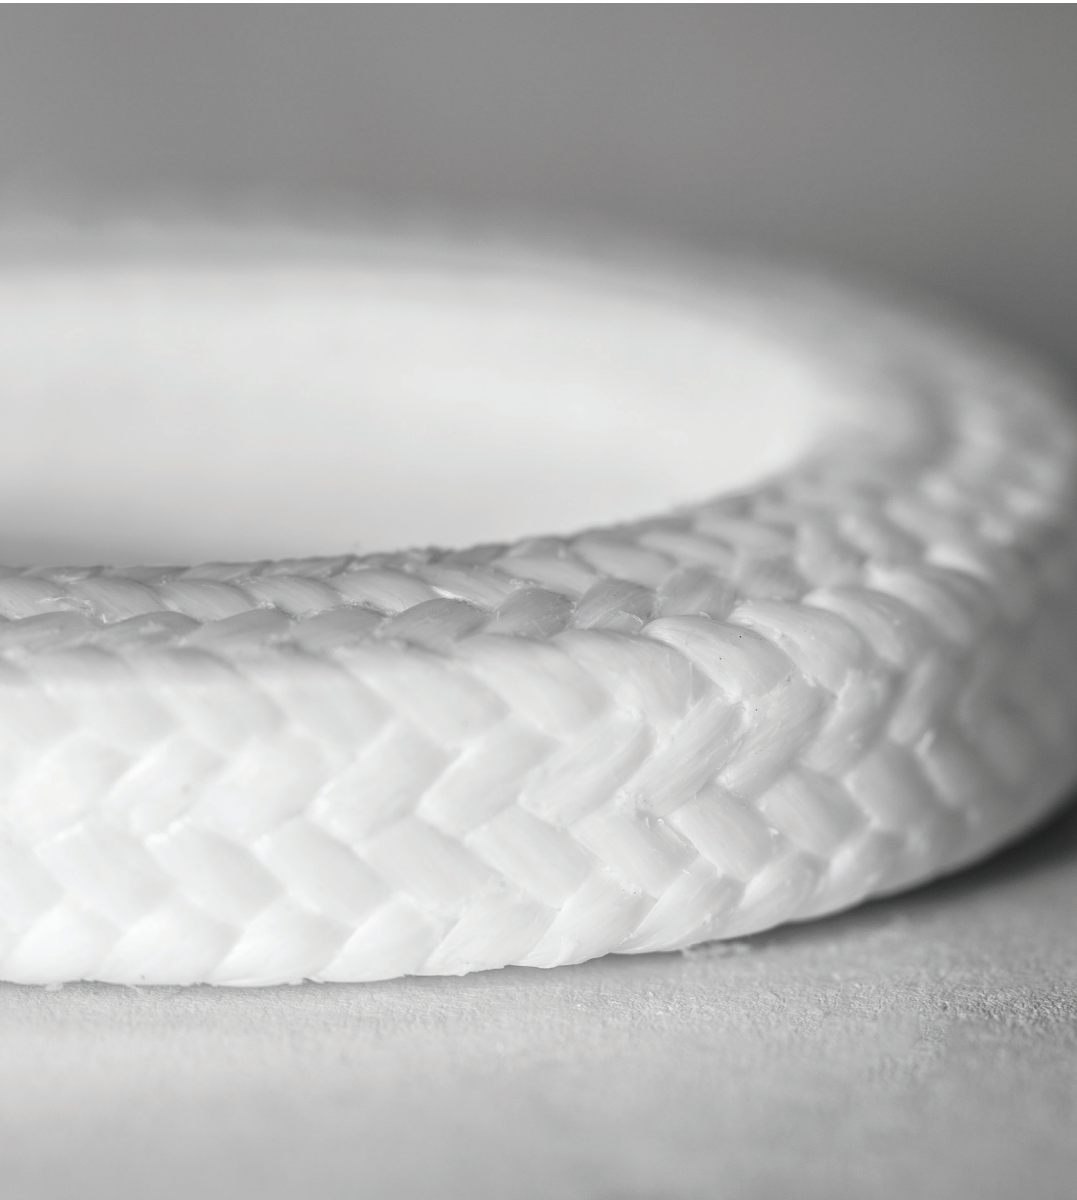

FEATURES

- This packing does not glaze in higher speed applications
- It is inert and virtually indestructible
- It has a lower coefficient of friction and high compressive strength

SPECIFICATIONS

Temperatures

- 500°F/260°C maximum

pH Range

- 0 to 14

Speeds

- 1200 fpm

Certified to ISO 9001:2015 Standards

This information is based on data that we believe to be reliable. Since conditions of product use are outside of our control, we make no warranties, expressed or implied and assume no liability in connection with any use of this information.
V0072020