

E S D



CARTRIDGE MOUNTED DOUBLE MECHANICAL SEAL

Specifications


Metal Parts: Standard metal parts: 316 SS
Standard springs: Hastelloy C

Face Materials: Standard inboard: Silbide vs. Silbide
Standard Outboard: Carbon vs. Ceramic or
Carbon vs. Silbide

Secondary Seals: Viton, EPR or AFLAS (Kalrez available)

Pressures: Up to 75 psi (g) (Discharge)
Up to 28" Hg (Vacuum)
Shaft Speeds: 1800 ft. / min.

Temperature: Up to 250° F (121° C)

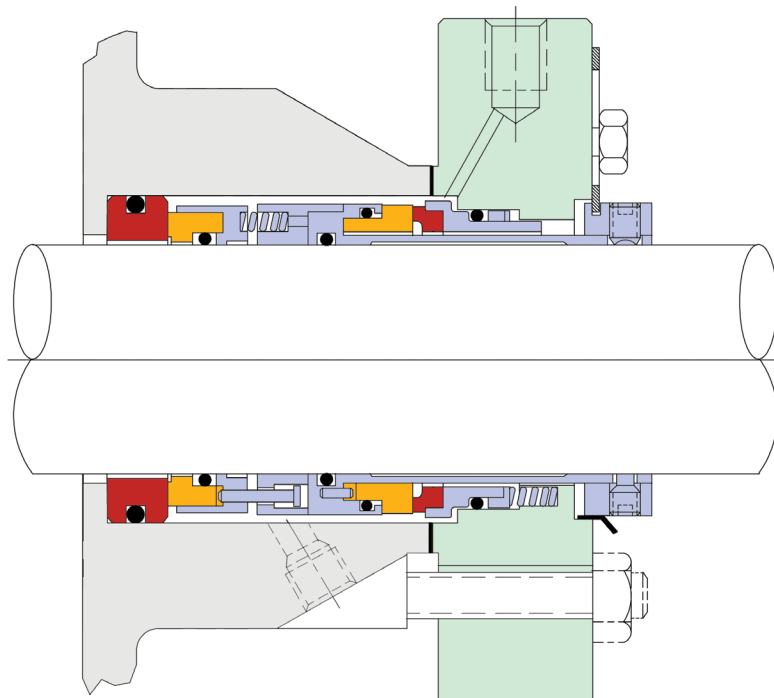

This information is based on data that we believe to be reliable. Since conditions of product use are outside of our control, we make no warranties, expressed or implied and assume no liability in connection with any use of this information.