


FG 4

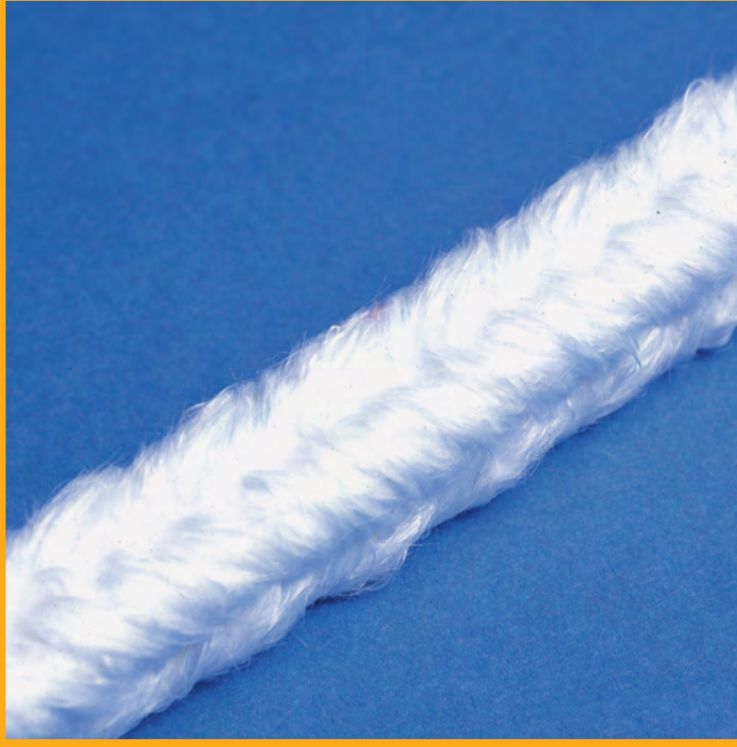

BRAIDED FIBERGLASS ROPE

RECOMMENDED FOR

Static applications. Extremely high temperatures up to 1000°F/538°C. For sealing molten metals, acids, solvents, etc. *Style 4 - Same as FG 4 except braided from continuous filament yarn.*

FEATURES

Will not shrink or swell in service and is completely incombustible.

EQUIPMENT

Gasketing material on covers of processing kettles, tanks, etc.

CONSTRUCTION

Square plaited from texturized filament, inorganic flexible glass fibers. Untreated.

This information is based on data that we believe to be reliable. Since conditions of product use are outside of our control, we make no warranties, expressed or implied and assume no liability in connection with any use of this information.

Certified to ISO 9001: 2000 Standards.

Updated April 2013

Quality Fluid Sealing Solutions for Industry.