


ML 4004

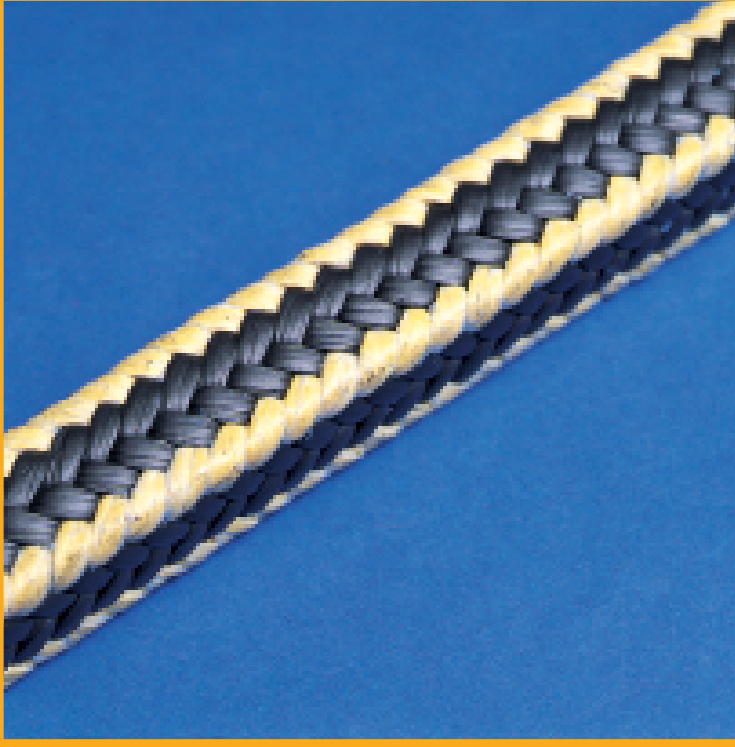

YELLOW JACKET PACKING

RECOMMENDED FOR

Marine applications including stern tube packing.
Low leakage rates for cleaner bilges.

SERVICE CONDITIONS

All type paper mill applications where graphite
is suitable. Shaft speeds to 2500 FPM;
temperatures to 500°F/260°C; pH range 3-11.

EQUIPMENT

Paper mill stock pumps, agitators, or any service
where strength and good lubricating qualities are
needed.

FEATURES

A combination braid of PTFE/Graphite composite
yarn and aramid fibers. This construction provides
the strength of aramid fibers and the heat
dissipating and lubricating qualities of the PTFE
and graphite matrix.

CONSTRUCTION

Multi-Lok Braid

TREATMENT

Light coat of an inert break-in oil.

This information is based on data that we believe to be reliable. Since conditions of product use are outside of our control, we make no warranties, expressed or implied and assume no liability in connection with any use of this information.