


## ML 6225

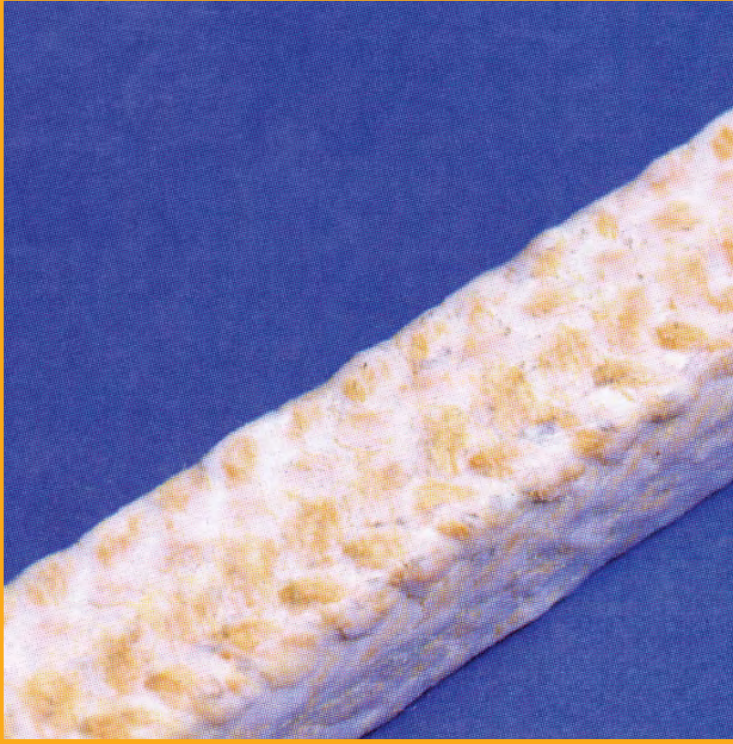

## TEK-PRO PACKING

### **RECOMMENDED FOR**

Pulp and paper mill applications, recovery pumps, chemical applications, caustic soda. An excellent all-around general service chemical packing.

### **SERVICE CONDITIONS**

Shaft speeds to 1885 FPM; temperatures to 550°F/288°C; pH range 3-12.

### **EQUIPMENT**

Rotating and reciprocating pump and valve equipment, mixers and agitators.

### **FEATURES**

A proprietary blend of non-asbestos TEK-PRO yarns treated with PTFE throughout the packing. The PTFE suspenoid thoroughly seals and fills all voids providing better resistance to chemical attack. A light lubricant is applied under pressure to improve run-in properties.

### **CONSTRUCTION**

Multi-Lok Braid

### **REMARKS**

The TEK-PRO yarns retain a greater volume of PTFE dispersion and are more uniformly distributed to provide longer and better sealing.

This information is based on data that we believe to be reliable. Since conditions of product use are outside of our control, we make no warranties, expressed or implied and assume no liability in connection with any use of this information.

Certified to ISO 9001: 2000 Standards.

Updated March 2013

**Quality Fluid Sealing Solutions for Industry.**