


# XR2 Mechanical Seal

The SEPCO<sup>®</sup> XR2 is easily assembled with only two halves. O-rings and gaskets are factory installed and do not require user attention. This assures factory tested leak free secondary sealing components. The XR2 has a balanced design which allows for pressures up to 200 psi (17 bar). This design feature greatly increases the range for applications of a split seal.

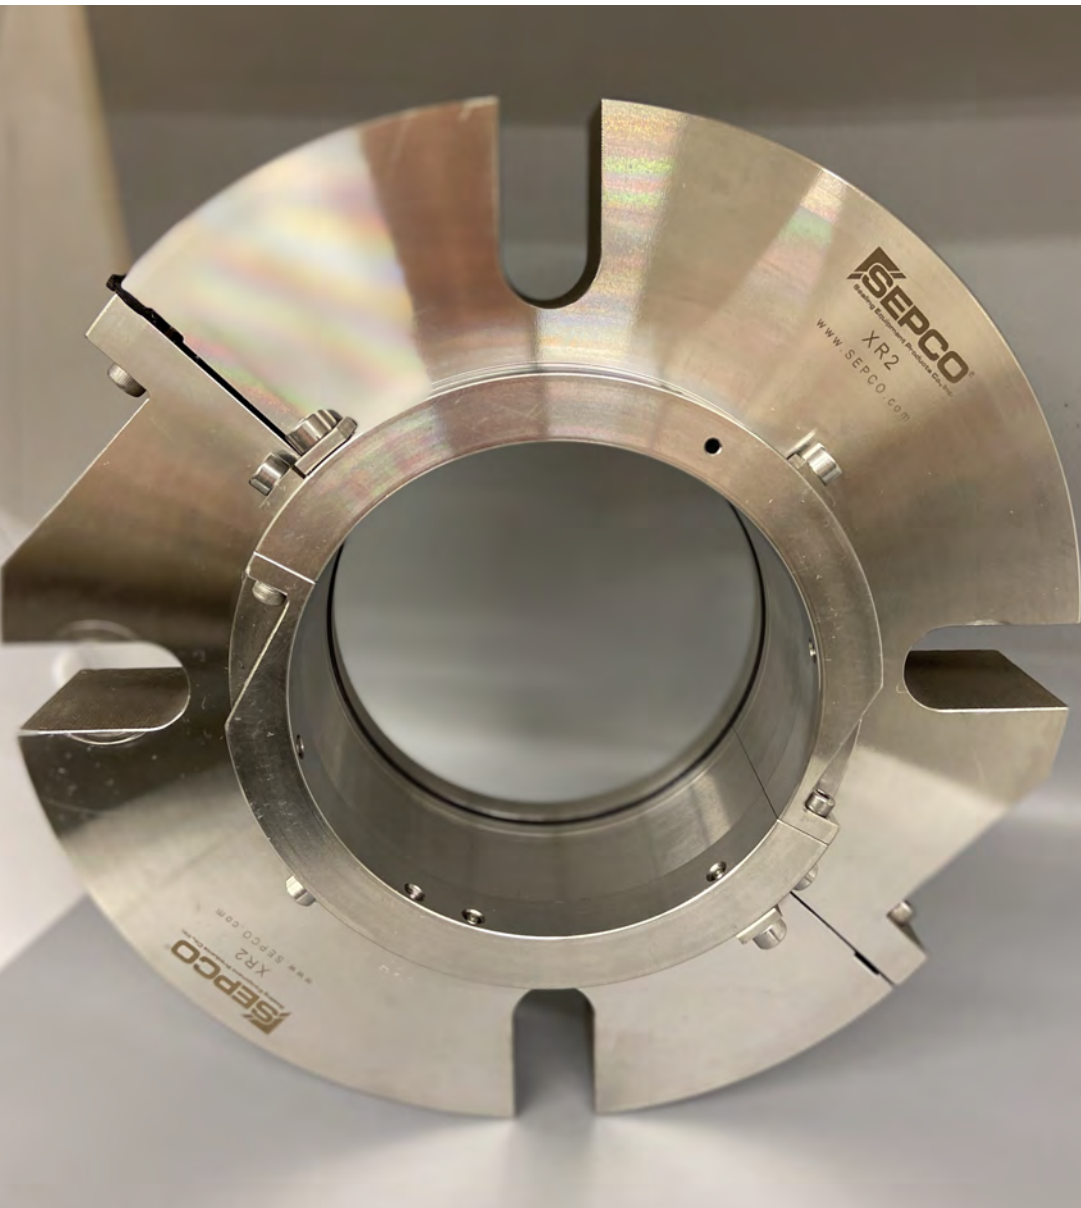

## FEATURES

- Balanced
- Nonclogging and provides positive drive to the stationary seal face
- Eliminates the need to dismantle any piece of equipment, large or small

## OPERATING PARAMETERS

- Temperatures up to 250°F (121°C)
- Pressure up to 200 psi

Certified to ISO 9001:2015 Standards

This information is based on data that we believe to be reliable. Since conditions of product use are outside of our control, we make no warranties, expressed or implied and assume no liability in connection with any use of this information.  
V030222